


AMBER WARNING LIGHTS



TWB-34A



TWB-42AM



TWB-44A



TWB-55A



TMF-50A



TMF-55A



TWB-63A



TWB-65A



TWB-67A/AM



TWB-46A-DIN




WB-58A-DIN




TMF-65ARC



TSB-5513/6413



TSB-3612/4512

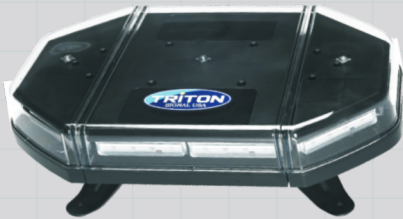


TMB-1812



TSB-5308



TMB-107




TMB-117



TMB-126



TMB-127

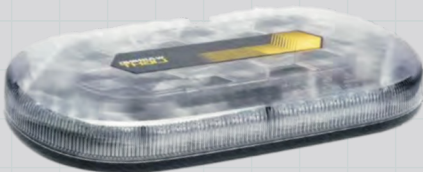

TMB-137




TMB-159




TDS-12



TWS-4A




TWS-6A



TSS-6



TLP-44A2



TWB-400A



TWB-600A



THS-2

TSFM SUPER-NOVA™ THRU-HOLE FLUSH-MOUNT STROBES



- THROUGH-HOLE FLUSH-MOUNT DESIGN
- RUGGED DIECAST ALUMINUM HOUSING
- POLYCARBONATE (PC) LENS
- OPERATING VOLTAGE: 10 TO 32 VOLTS
- SEALED IP67 DESIGN
- HIGH INTENSITY SAE CLASS-1 OUTPUT
- INTEGRATED CONTROL CIRCUITRY
- OPTIONAL 90 DEGREE STEEL BRACKET



ACTUAL SIZE
7/8"X1.3" D/L



**L-BRACKET AVAILABLE FOR
PURCHASE SEPARATELY AS TSFM-BKT**

TSFM-4 SINGLE AND DUAL COLORS

TSFM-4C: SINGLE **WHITE**

TSFM-4A: SINGLE **AMBER**

TSFM-4AC: DUAL **AMBER/WHITE**

TSFM-4AG: DUAL **AMBER/GREEN**

TSFM-4G: SINGLE **GREEN**

TSFM-4R: SINGLE **RED**

TSFM-4RB: DUAL **BLUE**


TSFM-4RB: DUAL **RED/BLUE**



MOUNTING GROMMET INCLUDED

CONCEALED LED STROBE SYSTEM

MODEL THS-2



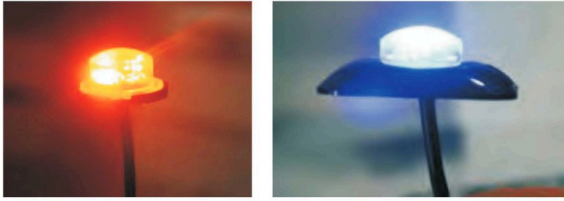


DUAL-HEAD THS-2A: AMBER
DUAL-HEAD THS-2AC: AMBER/CLEAR
DUAL-HEAD THS-2AG: AMBER/GREEN
DUAL-HEAD THS-2C: CLEAR



- Small Light-Head for internal mount within composite headlamps, turn-lamps and tail-lamps
- Selectable flash patterns with auto-synchronize features
- Lens design enhances light distribution
- Surface mount bezels (Black and Chrome)
- Base mounts vertically or horizontally
- Available in Amber, White, White/Amber, Amber/Green Or Clear
- Durable, polycarbonate lens for maximum impact resistance

Units = Inches

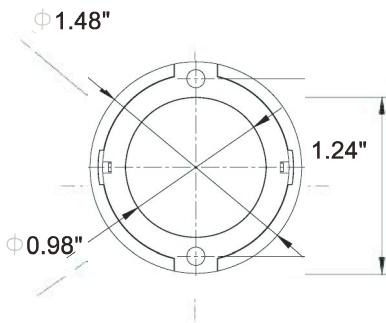

CHROME BEZELS & BLACK BEZELS INCLUDED

Technical Data:

Tech Specs:

Flash patterns:	14 flash patterns	
Mounting:	Headlight, Taillight or Surface Mount with optional Bezels	
Input Voltage:	10-32V	
Colors choice:	Amber	Amber/White
Operations Temperature:	-40°to + 65°C	

Triton 3-Year Warranty

TWS "WAFER STROBE" SERIES



TWS-4A (AMBER) TWS-4AC (AMBER/WHITE) TWS-4C (WHITE)

ALL MODELS ARE 0.25" THICK



INPUT VOLTAGE: 10~33V DC
3 WATT LEDS
SAE CLASS-1
SHATTERPROOF PC LENS
WATERPROOF - IP68
MULTIPLE FLASH PATTERNS



TWS-6A (AMBER) TWS-6AC (AMBER/WHITE) TWS-6AG (AMBER/GREEN)




**SINGLE COLOR AND DUAL
 COLOR 50/50 MODELS**



TWS-12 MODEL - AVAILABLE COLORS

AMBER ONLY: TWS-12A
AMBER/WHITE (SPLIT): TWS-12AC
RED/BLUE (SPLIT): TWS-12RB
AMBER/GREEN (SPLIT): TWS-12AG

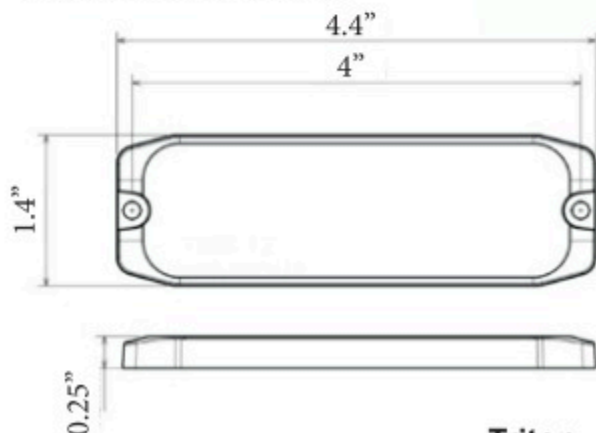

Triton 3-Year Warranty

1-877-874-3744

www.triton-signal.com

BRAKE LAMP WITH EARLY WARNING STROBE

**WIRES INTO BRAKE LAMP CIRCUIT AND WHEN BRAKES ARE
APPLIED FLASHES AMBER FIVE TIMES THEN TURNS TO RED
CONTINUOUS BRAKE LAMP**

ABOUT THIS PRODUCT

Reduces the
likelihood of
rear-end
collisions.

Strobing amber
light gives
increased brake
warning.

The strobe flashes
amber five times
then turns to
constant red.

Wires into brake
lamp circuit.

Approved by DOT
for on-road use.



WAFER STYLE 1/4" THICK

TWS-6BWS



TWS-4BWS



THICKER 1/2" BEZELED STYLE

TSS-6BWS



TSS-4BWS



Triton 3-Year Warranty

SURFACE STROBE TSS-6 SERIES



TSS-6



TSS-12



TSS-3



TSS-4

RUGGED, SAE CLASS-1 HIGH INTENSITY SURFACE STROBES

- Low current draw, high lumens output
- TSS-4, TSS-6 Single Color 15 Selectable flash patterns
- Dual color 8 Selectable flash patterns
- TSS-3, TSS-12 19 Selectable flash patterns
- Last flash pattern memory
- Shatterproof polycarbonate lens
- Polycarbonate aluminum-coated reflector
- Cast aluminum housing
- Universal mount with L-bracket
- Reverse polarity protected

AVAILABLE COLORS:

TSS-3A:Amber
 TSS-3C:Clear
 TSS-4A:Amber
 TSS-4A/C:Amber/Clear
 TSS-6A:Amber
 TSS-6AC:Amber/Clear
 TSS-6C:Clear
 TSS-6R:Red
 TSS-6B:Blue
 TSS-6AB:Amber/Blue
 TSS-6AG:Amber/Green
 TSS-6BR:Blue/Red
 TSS-6RC:Red/Clear
 TSS-12A:Amber
 TSS-12AC:Amber/Clear
 TSS-12AB:Amber/Blue
 TSS-12AG:Amber/Green

SPECIFICATIONS TSS-3

LIGHT SOURCE	3X3 WATT LEDs
SIZE	2.75" x 1" x 0.4"
WATERPROOF	IP68
WORKING TEMP	-14°F to 149°F
VOLTAGE	10 - 30V
WATTAGE	9 Watts

SPECIFICATIONS TSS-4

LIGHT SOURCE	4X3 WATT LEDs
SIZE	3.74" x 1.18" x 0.51"
WATERPROOF	IP6K9K
WORKING TEMP	-14°F to 149°F
VOLTAGE	10 - 30V
WATTAGE	9 Watts

SPECIFICATIONS TSS-6

LIGHT SOURCE	6X3 WATT LEDs
SIZE	4.79" x 1.18" x 0.51"
WATERPROOF	IP68
WORKING TEMP.	-14°F to 149°F
VOLTAGE	10 - 30V
WATTAGE	12 Watts

SPECIFICATIONS TSS-12

LIGHT SOURCE	12X3 WATT LEDs
SIZE	4.25" x 1.5" x 0.5"
WATERPROOF	IP68
WORKING TEMP.	-14°F to 149°F
VOLTAGE	10 - 30V
WATTAGE	36 Watts

TWB-400A & TWB-600A **LED FLUSH-MOUNT STROBES**

**SAE CLASS-1
GROMMET-MOUNT
STROBE-LIGHT**



SIZE: 4"x 4"x 1" (L/W/H)



TWB-400A

TYPICAL APPLICATIONS:

- **UTILITY TRUCKS**
- **CONSTRUCTION TRUCKS**
- **PICKUP TRUCKS**



AMBER: TWB-600A
AMBER/GREEN: TWB-600AG

FEATURES:


- 6 Different, Selectable Flash Patterns.
- Power Level: SAE Class-1.
- Voltage: 10 to 16 Volts DC.
- Base and Mounting Feet: Aluminum.
Available in AMBER or AMBER/GREEN



SIZE: 6.5"x 2.25"x 1" (L/W/H)

DASH/VISOR-MOUNT STROBE-LAMP

MODEL TDS-12



**RUGGED, SAE CLASS-1
HIGH INTENSITY**

**AMBER MODEL: TDS-12A
AMBER/WHITE MODEL: TDS-12AC
RED MODEL: TDS-12R
RED/WHITE MODEL: TDS-12RC
AMBER/GREEN MODEL: TDS-12AG**

- 8 LED Light-Head
- 3 Watt LEDs
- 19 Selectable Flash Patterns
- DC 12~24V
- Dimensions: 8"L x 3"W x 2"H
- 3-Meter wire with Cigar Plug
- 3 Suction Cups or Screws Mount
- SAE J595 CLASS 1 Double Flash



Triton 3-Year Warranty

1-877-874-3744

www.triton-signal.com

WARNING BEACON AMBER LED MODELS TWB-42A / TWB-44A / TWB44AA



MODEL TWB-42A (FIXED MOUNT) MODEL TWB-42AM (MAGNETIC)

ECE R65, TA2, SAE CLASS-1
LOW PROFILE STROBE LIGHT

- 360 Degree
- SAE J845 Class-1 Certified
- Reverse Polarity Protected
- 12 Flash Patterns
- Shatterproof Polycarbonate lens and base

SPECIFICATIONS

VOLTAGE	12-32 VDC
LIGHT SOURCE	32 LEDS
CHARGER	CIGAR PLUG (Magnetic mount)
FLASH PATTERNS	12 Flash Patterns
WATERPROOF	IP67 Protection Standard
WORKING TEMPERATURE	-22F to 122F
SIZE	2"x 4" (Height/Diameter)


MODEL TWB-44A/AM

SAE CLASS-1 and E9 Certified
FIXED / MAGNETIC MOUNT

- Three bolt surface mount TWB-44A
Magnetic mount TWB-44AM
Pipe mount/Aluminum base TWB-44AA
- 12 Flash Patterns
- Reverse Polarity Protected
- Shatterproof Polycarbonate lens and base

SPECIFICATION

VOLTAGE	12-32 VDC
LIGHT SOURCE	32 LEDS
CHARGER	CIGAR PLUG (Magnetic mount)
FLASH PATTERNS	12 Flash Patterns
WATERPROOF	IP67 Protection Standard
WORKING TEMPERATURE	-22F to 122F
SIZE	4"x 5" (Height/Diameter)



Triton 3-Year Warranty

WARNING BEACON MODELS

TWB-63 AND TWB-65



TWB-63A & TWB-63AM (MAGNETS)



TWB-63C & TWB-63CM (MAGNETS)

SAE J845 CLASS-1 and E9 Certified FIXED / MAGNETIC / POLE MOUNT

- High Lumens output with low current draw
- Reverse polarity protected
- 8 Selectable flash patterns
- Aluminum base

SPECIFICATIONS

SURFACE MOUNT	3 Screws or Magnets
POWER WATTS	36 Watts
VOLTAGE	12-24 VDC
LIGHT SOURCE	16 LEDS
FLASH PATTERNS	8 Flash Patterns
WATERPROOF	IP66 Protection Standard
WORKING TEMPERATURE	-45F to 150F
SIZE	6"x 6" x 3.25" (L/D/H)



TWB-65C

SAE J845 CLASS-1 and E9 Certified FIXED / MAGNETIC / POLE MOUNT

- High Lumens output with low current draw
- Reverse polarity protected
- 8 Selectable flash patterns
- Aluminum base

SPECIFICATIONS

SURFACE MOUNT	3 Screws or Magnets
POWER WATTS	36 Watts
VOLTAGE	10-48 VDC
LIGHT SOURCE	20 LEDS
FLASH PATTERNS	8 Flash Patterns
WATERPROOF	IP66 Protection Standard
WORKING TEMPERATURE	-45F to 150F
SIZE	6"x 6"x 5" (L/D/H)

Triton 3-Year Warranty

AMBER LED WARNING BEACON

TWB-65 & TWB-67A

TWB-65A (FIXED MOUNT)
TWB-65AM (MAGNETIC)



SAE J845 CLASS-1 and E9 Certified
FIXED / MAGNETIC / POLE MOUNT

- High Lumens output with low current draw
- Reverse polarity protected
- 8 Selectable flash patterns
- Aluminum base

SPECIFICATIONS

SURFACE MOUNT	3 Screws or Magnets
POWER WATTS	36 Watts
VOLTAGE	10-48 VDC
LIGHT SOURCE	16 LEDS
FLASH PATTERNS	8 Flash Patterns
WATERPROOF	IP67 Protection Standard
WORKING TEMPERATURE	-45F to 150F
SIZE	6"x 6"x 5" (L/D/H)

TWB-65AV2(FIXED MOUNT)
TWB-65ACM (AMBER/WHITE MAGNETIC)



SAE J845 CLASS-1 and E9 Certified
FIXED / MAGNETIC / POLE MOUNT

- High Lumens output with low current draw
- Reverse polarity protected
- 8 Selectable flash patterns
- Aluminum base and top plate

SPECIFICATIONS

SURFACE MOUNT	3 Screws or Magnets
POWER WATTS	36 Watts
VOLTAGE	10-48 VDC
LIGHT SOURCE	16 LEDS
FLASH PATTERNS	8 Flash Patterns
WATERPROOF	IP67 Protection Standard
WORKING TEMPERATURE	-45F to 150F
SIZE	6"x 6"x 7" (L/D/H)

TWB-67A (FIXED MOUNT)
TWB-67AM (MAGNETIC)

Triton 3-Year Warranty

CLEAR LED WARNING BEACONS

TWB-55,TWB-65

MODEL TWB-55A/AC/AG/ACM

AMBER MODEL: AMBER LENS

DUAL-COLOR MODEL: CLEAR LENS



**SAE J845 CLASS-1 and E9 Certified
FIXED / MAGNETIC / POLE MOUNT**

- High Lumens output with low current draw
- Reverse polarity protected
- 8 Selectable flash patterns
- PP base

SPECIFICATIONS

SURFACE MOUNT	3 Screws or Magnets
POWER WATTS	17Watts
VOLTAGE	12-24 VDC
LIGHT SOURCE	48 LEDS
FLASH PATTERNS	8 Flash Patterns
WATERPROOF	IP66 Protection Standard
WORKING TEMPERATURE	-45F to 150F
SIZE	5"x5"x4" (L/D/H)

MODEL TWB-65AC/AG



**SAE J845 CLASS-1 and E9 Certified
FIXED / MAGNETIC / POLE MOUNT**

- High Lumens output with low current draw
- Reverse polarity protected
- 8 Selectable flash patterns
- Aluminum base

SPECIFICATIONS

SURFACE MOUNT	3 Screws or Magnets
POWER WATTS	36 Watts
VOLTAGE	12-48 VDC
LIGHT SOURCE	48LEDS
FLASH PATTERNS	8 Flash Patterns
WATERPROOF	IP66 Protection Standard
WORKING TEMPERATURE	-45F to 150F
SIZE	6"x 6"x 5" (L/D/H)

CLASS-1 LED BEACON WITH DIN POWER BRACKET/PLUG TWB-46A-DIN



FEATURES

- SAE CLASS-1 HIGH INTENSITY OUTPUT
- BRONZE CORROSION-PROOF SLEEVE
- FLEXI NECK REDUCES IMPACT DAMAGE
- INTERNAL DIN CONNECTOR



DIN POWER MOUNTING BRACKET

- MODEL TWB-46-BKT (HORIZONTAL TYPE)
- MODEL TWB-46-BKL (VERTICAL TYPE)
- ORDER BRACKET SEPARATELY



TWB-46-BKL



TWB-46-BKT

Triton 5-Year Warranty

WARNING BEACONS AMBER LED

TWB-58A & TRF-65AM

MODEL TWB-58A-DIN

SAE CLASS-2 and E9 Certified

- DIN Pole mount
- 3 Flash / 4 Rotating patterns
- Reverse polarity protected
- Shatterproof Polycarbonate lens and base

SPECIFICATIONS

VOLTAGE	12-24 VCD
LIGHT SOURCE	10 LEDS
POWER WATTS	28 Watts
FLASH PATTERNS	3 Flash / 4 Rotating Patterns
WATERPROOF	IP67
WORKING TEMPERATURE	-22F to 150F
SIZE	8"x 5" (Height/Diameter)



MODEL TRF-65AM

REMOTE CONTROLLED

SAE CLASS-2 and E9 Certified

- 360 Degree magnetic /Suction mount
- Rechargeable warning beacon
- Reverse polarity protected
- Shatterproof Polycarbonate lens and base

SPECIFICATIONS

LIGHT SOURCE	10 LEDS
POWER WATTS	28 Watts
FLASH PATTERNS	3 Flash / 4 Rotating Patterns
WATERPROOF	IP67
WORKING TEMPERATURE	-22F to 150F
SIZE	6"x 5" (Height/Diameter)



Triton 5-Year Warranty



MAGNA-FLASH™

MAGNETIC RECHARGEABLE WARNING STROBE LIGHTS



**SUCTION-SKIRT &
STRONG MAGNET**



TMF-55A / TMF-55AX

**TMF-55A: SUCTION & MAGNET
TMF-55AX: EXTRA-STRENGTH MAGNET**

SAE CLASS-1 SUCTION MAGNA MOUNT

- Magnetic
- 360 Degree
- Rechargeable Warning Strobe Light
- SAE J845 Class-1 Certified
- Reverse Polarity Protected
- 2 (SAE standard) Flash Patterns
- Shatterproof Polycarbonate lens and base

SPECIFICATIONS

MAGNETIC MOUNT	20LB Magnet
POWER WATTS	12 WATTS
LIGHT SOURCE	36 LEDs
CHARGER	Cigar Plug and Charger
FLASH PATTERNS	2 (SAE Standard) Patterns
WATERPROOF	IP67 Protection Standard
WORKING TEMPERATURE	-22F to 122F
SIZE	5.5"x 5.5"x 4"



TMF-50A

**SAE CLASS-1, RUGGED
HIGH INTENSITY STROBE LIGHT**

- Magnetic
- 360 Degree
- Rechargeable Warning Strobe Light
- SAE J845 Class-1 Certified
- Reverse Polarity Protected
- 12 Flash Patterns
- Shatterproof Polycarbonate lens and base

SPECIFICATIONS

MAGNETIC MOUNT	20LB Magnet
POWER WATTS	9 Watts
LIGHT SOURCE	12 LEDs
CHARGER	Cigar Plug and Charger
FLASH PATTERNS	12 Patterns
WATERPROOF	IP67
WORKING TEMPERATURE	-1F to 129F
SIZE	5"x 5"x 3.5"

Triton 2-Year Warranty

1-877-874-3744

www.triton-signal.com



RECHARGEABLE MAGNETIC LED WARNING BEACON

4" x 4" WARNING STROBE KIT

TRITON AMBER TLP-44A2 AND RED TLP-44R2 MAGNETIC,
RECHARGEABLE WARNING LAMP SUITABLE FOR AG EQUIPMENT



FEATURES

- MAGNETIC RECHARGEABLE
- CARRY CASE (A PAIR)
With dual charge cord
- AMBER/RED COLOR AVAILABLE

SIZE AND COLOR

- 4" X 4" MODEL TLP-44A
- 4" X 4" MODEL TLP-44-R
- 4" X 4" MODEL TLP-44-A2 (PAIR)
- 4" X 4" MODEL TLP-44-R2 (PAIR)




CARRY CASE (A PAIR) - TLP-44A2 or TLP-44R2



- 4" X 4" MODEL TLP-44R SINGLE
- 4" X 4" MODEL TLP-44A SINGLE

Triton **2-Year Warranty**

TWB GUNSMOKE™ BEACONS

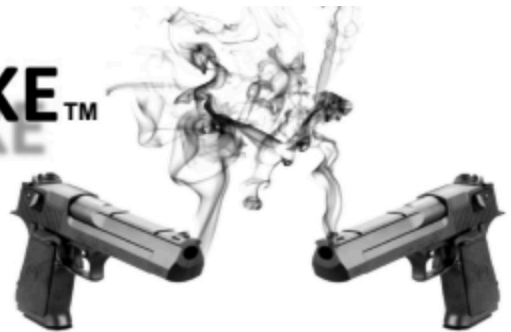

SMOKED-LENS SAE CLASS-1 BEACON SERIES



**TWB-43AXM
HEIGHT: 3"**

**MAGNET & VACUUM
SILICONE SKIRT
WITH REMOVAL-TAB**

**LOW-PROFILE
12-24 VOLTS
CISPR-3 RATING
SAE CLASS-1
IP-67 SEALED
8 FLASH PATTERNS**



**TWB-44AXM
HEIGHT: 4"**

**ALL MODELS HAVE
8 FLASH PATTERNS
INCLUDING ROTATING**

**MEDIUM-PROFILE
12-24 VOLTS
CISPR-3 RATING
SAE CLASS-1
IP-67 SEALED
8 FLASH PATTERNS**

**HIGH-PROFILE
12-24 VOLTS
CISPR-3 RATING SAE
CLASS-1 IP-67
SEALED
8 FLASH PATTERNS**




**TWB-45AXM
HEIGHT: 5"**

**ALL MODELS CARRY TRITON'S
3-YEAR LIMITED WARRANTY**

LED MINI LIGHT BAR TMB-117 SERIES

SAE CLASS-1 MINI LIGHT BAR

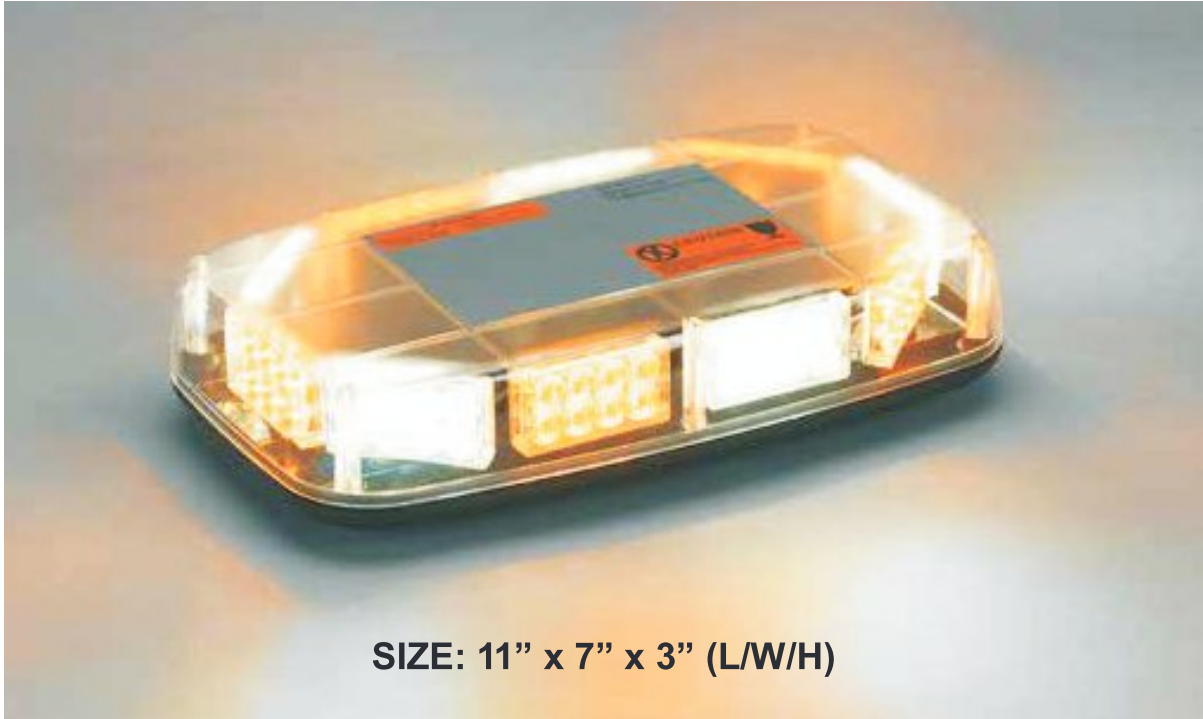

**TBM-3/4
OPTIONAL SIDE
MIRROR MOUNTING
BRACKET**



TMB-117AM



TMB-117ACM



TMB-117AGM

TYPICAL APPLICATIONS:

- UTILITY TRUCKS
- CONSTRUCTION TRUCKS.
- PICKUP TRUCKS.

FEATURES:

- 10 Different, Selectable Flash Patterns.
- 80 COB High-Intensity LED's.
- Power Level: SAE Class-1.
- Voltage: 10 to 32 Volts DC.
- Polycarbonate clear cover.
- Strong base magnets.
- 10ft cord with cigar plug with on/off and flash pattern switches.

Triton 3-Year Warranty

LOW-PROFILE MINI STROBE-BARS TMB-107 AND TMB-127 SERIES

HIGH INTENSITY SAE CLASS-1
SLEEK DESIGN SUITS SMALLER VEHICLE APPLICATIONS



Size: 10"x 7" x 2.5" (L/W/H)


TMB-107

RUGGED, SAE CLASS-1 **360 DEGREES HIGH INTENSITY**

- 40 HIGH INTENSITY LEDs
- LOW CURRENT DRAW, HIGH LUMENS OUTPUT
- 10 TO 30 VOLTS DC OPERATION
- SAE J845 CLASS 1 CERTIFIED (SOLID COLOR)
- 20 SELECTABLE FLASH PATTERNS
- LAST FLASH PATTERN MEMORY
- ECE R65 & ECE10 APPROVED
- SHATTERPROOF POLYCARBONATE LENS
- ABS COVER
- POLYCARBONATE ALUMINUM-COATED REFLECTOR
- 8FT POWER CORD

AMBER: 
FIXED MOUNT MODEL: TMB107A
MAG MOUNT MODEL: TMB107AM


AMBER/CLEAR: 
FIXED MOUNT MODEL: TMB1007AC
MAG-MOUNTMODEL: TMB107ACM

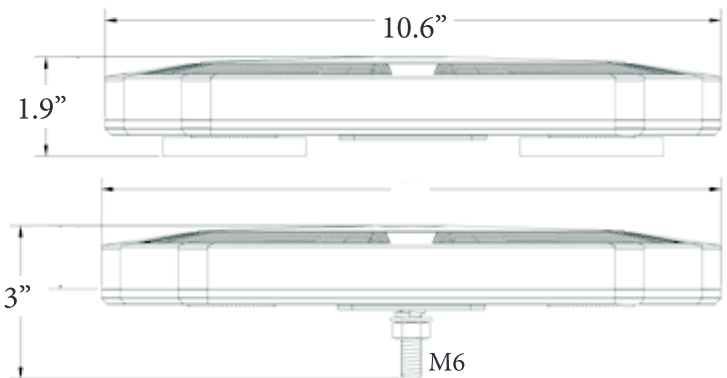

Size: 12"x 7" x 2" (L/W/H)

AMBER: 
MAG MOUNT MODEL: TMB127AM

AMBER/CLEAR: 
MAG-MOUNTMODEL: TMB127ACM

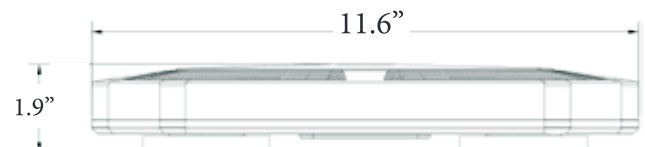

Triton 3-Year Warranty

LED MINI ROTATING STROBE LIGHT BAR

TMB-126AM & TLP-126ARC

TLP-126ARC



SIZE: 12" X 6" X 3" (L/W/H)

RECHARGEABLE - MAGNETIC

CERTIFICATION	SAE, ECE, EMC, RIO, CE, ROHS
OPERATING VOLTAGE	12-32 V
LED POWER	30 W
WATERPROOF	IP67
TYPE	BASE MOUNT
FLASH PATTERNS	5 Modes Flash & 5 Modes Rotation
LED COLOR	Amber
LED QUANTITY	84 PCS
OPERATING TEMP.	-40C - 65C
SIZE	12"x 6"x 2" (L/D/H)
CHARGING TIME	4.5 Hours
DISCHARGING TIME	6.5 Hours

**WIRELESS - MAGNETIC - RECHARGEABLE
FULLY REMOTE CONTROLLED
MODEL TLP-126ARC**

TMB-126AM



SIZE: 12" X 6" X 3" (L/W/H)

MAGNETIC ROTATING STROBE BAR

CERTIFICATION	SAE, ECE R65, EMC, R10
OPERATING VOLTAGE	12-32 V
LED POWER	38 W
WATERPROOF	IP67
TYPE	Magnetic Mount
FLASH PATTERNS	5 Modes Flash & 5 Modes Rotation
LED COLOR	Amber
LED QUANTITY	84 PCS
OPERATING TEMP.	-40C - 65C
SIZE	12"x 6"x 2" (L/D/H)
CHARGING TIME	4.5 Hours
DISCHARGING TIME	6.5 Hours

**STROBING AND ROTATING FEATURES
MODEL: TMB-126AM**

Triton 3-Year Warranty


1-877-874-3744

www.triton-signal.com

LED MINI LIGHT BAR 13" SERIES

RECHARGEABLE MAGNETIC

MODEL TLP-137ARC (AMBER REMOTE CONTROL)
MODEL TLP-137ACRC (AMBER/WHITE REMOTE CONTROL)
COMPLETELY WIRELESS WITH REMOTE ON/OFF CONTROL

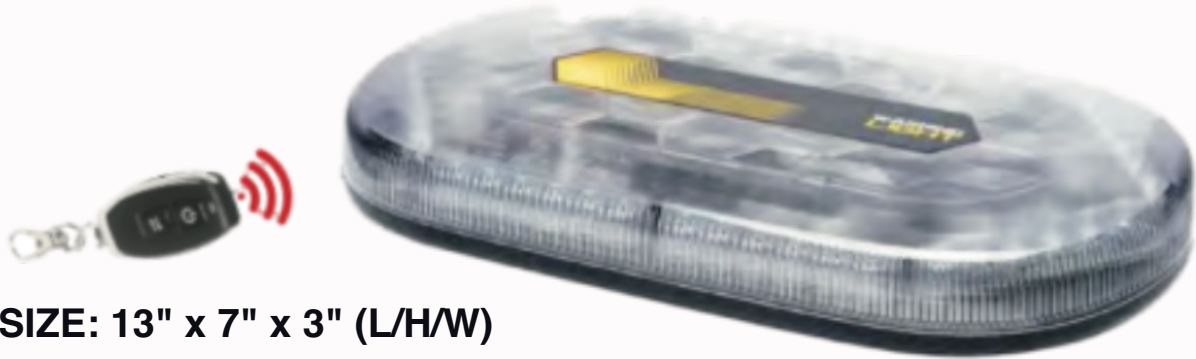

SIZE: 13" x 7" x 3" (L/H/W)

TYPICAL APPLICATIONS :

- UTILITY TRUCKS
- WORK SITE TRUCKS
- PICKUP TRUCKS

FEATURES:

- 10 DIFFERENT, SELECTABLE FLASH PATTERNS
- 48 HIGH- HIGH-INTENSITY LED'S
- POWER LEVEL: SAE CLASS-1
- RECHARGEABLE 8 HOURS RUN TIME
- POLYCARBONATE CLEAR COVER
- STRONG BASE MAGNETS
- REMOTE CONTROL ON/OFF(ONLY FOR TLP-SERIES)



TMB-137 AM

(AMBER WITH MAGNETS)



TMB-137ACM

(AMBER/WHITE WITH MAGNETS)



TMB-137AGM

(AMBER/GREEN WITH MAGNETS)

MANUAL ON/OFF MODEL TMB-137



SIZE: 13" x 7" x 3" (L/H/W)

Triton 3-Year Warranty

LED MINI LIGHT BAR

TMB-159 SERIES

(15 INCH)



ACTUAL SIZE: 15" x 9" x 3" (W/D/H)

RUGGED, SAE CLASS-1 360 DEGREES HIGH INTENSITY

- Low current draw, high lumens output
- 10 to 30 Volts DC operation
- SAE J845 Class 1 certified
- 10 Selectable flash patterns
- Shatterproof polycarbonate lens and base
- Polycarbonate aluminum-coated reflector
- 8ft Power cord
- Reverse polarity protected
- Four studs or magnet mount

AMBER FIXED MOUNT MODEL: TMB-159A

AMBER MAGNET MOUNT MODEL: TMB-159AM



AMBER/CLEAR FIXED MOUNT MODEL: TMB-159AC

AMBER/CLEAR MAGNET MOUNT MODEL: TMB-159ACM

RED FIXED/MAGNET MOUNT MODEL: TMB-159R/RM

RED/CLEAR FIXED/MAGNET MOUNT MODEL: TMB-159RC/RCM

AMBER/GREEN FIXED/MAGNET MOUNT MODEL: TMB-159AGM



Magnets

Triton 3-Year Warranty

1-877-874-3744

www.triton-signal.com

LED MINI LIGHT BAR 16 INCH MAGNETIC WITH CIGAR PLUG

MODEL TMB-168AM (AMBER)

MODEL TMB-168AM (AMBER/WHITE)



SIZE: 16" x 8" x 3" (L/H/W)

TYPICAL APPLICATIONS :

- UTILITY TRUCKS
- WORK SITE TRUCKS
- PICKUP TRUCKS

FEATURES:

- 10 DIFFERENT, SELECTABLE FLASH PATTERNS
- 60 HIGH-INTENSITY LED'S
- POWER LEVEL: SAE CLASS-1
- POLYCARBONATE CLEAR COVER
- STRONG BASE MAGNETS



TMB-167 AM

(AMBER WITH MAGNETS)



TMB-167ACM

(AMBER/WHITE WITH MAGNETS)

Triton 3-Year Warranty

1-877-874-3744

www.triton-signal.com

18-INCH LED MINI LIGHT BAR

TMB-1812

18" x 12" SAE CLASS-1

LED MINI LIGHT BAR

**ADJUSTABLE SPIDER-LEGS
FOR FLEXIBLE MOUNTING CONFIGURATION.**



FEATURES:

- 11 Different Selectable Flash Patterns
- 38 COB High-Intensity LED's.
- Power Level: SAE Class-1.
- Voltage: 10 to 32 Volts DC.
- Base and Mounting Feet: Aluminum

TYPICAL APPLICATIONS:

- UTILITY TRUCKS
- CONSTRUCTION TRUCKS.
- PICKUP TRUCKS.



18" x 12" x 5" (L/W/H)

AMBER MODEL: TMB-1812A

AMBER/WHITE MODEL: TMB-1812AC

Triton 5-Year Warranty

1-877-874-3744

www.triton-signal.com

AMBER-SABER TRAFFIC ADVISOR BARS

HIGH-VISIBILITY LOW-PROFILE LED BARS



MODEL TAS-48A (48-INCHES)



REAR STUD SURFACE-MOUNTING



MODEL TAS-40A (40-INCHES)



**INSTALLS ON WINDSHIELD, FRONT OR REAR BUMPER
POWERFUL 3 WATT LEDS IN 18 WATT STROBING MODULES**

SPECIFICATIONS

- 12 Volts D.C. Operation
- Built-in 12 Selectable flash patterns and directional pattern
- Sealed to IP67 Standard
- Flash and director patterns include: "Pass-Left", "Pass-Right", Wig-Wag etc.
- Full-feature controller with 20ft extension cord

Triton 3-Year Warranty

FULL-SIZED LIGHT BARS



FULL SIZE 36-INCH AND 45-INCH LIGHT BARS



ADJUSTABLE SPIDER-LEGS FOR FLEXIBLE MOUNTING OPTIONS

FEATURES

- 11 SELECTABLE FLASH PATTERNS
- COB HIGH-INTENSITY LED'S
- POWER LEVEL: SAE CLASS-1
- VOLTAGE: 10 TO 32 VOLTS DC.
- BASE AND MOUNTING FEET: ALUMINUM.

TYPICAL APPLICATIONS :

- UTILITY TRUCKS
- CONSTRUCTION TRUCKS
- PICKUP TRUCKS

36-INCH AMBER MODEL: TSB-3612A

36-INCH AMBER/WHITE MODEL TSB-3612AC

45-INCH AMBER MODEL: TSB- 4512A

45-INCH AMBER/WHITE MODEL TSB- 4512AC

Triton 5-Year Warranty

Adjustable Spider Legs



SHARK™ STROBE-BAR

FULL-SIZE 54-INCH LOW-PROFILE LED LIGHT BAR TSB-5308



**FULL-SIZE SAE CLASS-1
LED LIGHT BAR**

**AERODYNAMIC SLEEK PROFILE
ADJUSTABLE SPIDER-LEGS
FOR FLEXIBLE MOUNTING
CONFIGURATION.**


TYPICAL APPLICATIONS:

- UTILITY TRUCKS
- CONSTRUCTION TRUCKS.
- PICKUP TRUCKS.

FEATURES:

- 10 Different, Selectable Flash Patterns.
- 136 COB High-Intensity LED's.
- Power Level SAE Class-1.
- Voltage: 10 to 32 Volts DC.
- Base and Mounting Feet: Aluminum.

Adjustable Spider Legs

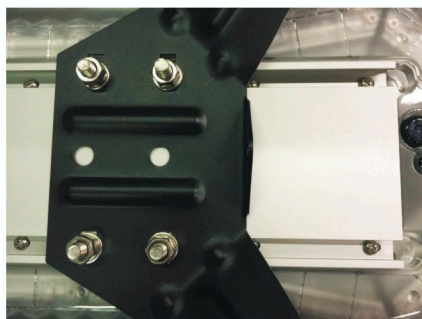

**ADJUSTABLE SPIDER-LEGS
FOR FLEXIBLE MOUNTING CONFIGURATION.**



53" x 8" x 4" (L/W/H)

**AMBER MODEL: TSB-5308A
AMBER/WHITE 50/50 MODEL TMB-5308AC**

Triton 5-Year Warranty

1-877-874-3744

www.triton-signal.com

BULL-SHARK™ WRECKER BARS



FULL-SIZE LOW-PROFILE STROBE BARS

TSB-5513 / TSB-5513A TSB-6413 / TSB-6413A

FULL-SIZE 55-INCH & 64 INCH STROBE-LIGHT BARS



**LED TRAFFIC DIRECTOR
WITH STOP/TAIL/TURN
AND WHITE ALLEY AND
TAKE-DOWN LAMPS**



DIMENSIONS:

TSB-5513: 55" x 13" x 4" (L/W/H)

TSB-6413: 64" x 13" x 4" (L/W/H)

FEATURES:

- SAE Class 1
- 45 Selectable Flash Patterns
Front & Rear
- COB High-Intensity LEDs
- 10 to 32 Volts
- Mounting Feet and Roof Ties
- Remote controller with display

Adjustable Spider Legs



**AERODYNAMIC SLEEK PROFILE
ADJUSTABLE SPIDER-LEGS
FOR FLEXIBLE MOUNTING
CONFIGURATION**



Triton 5-Year Warranty

1-877-874-3744

www.triton-signal.com